


239.00 EUR  
incl. 19% VAT, plus [shipping](#)

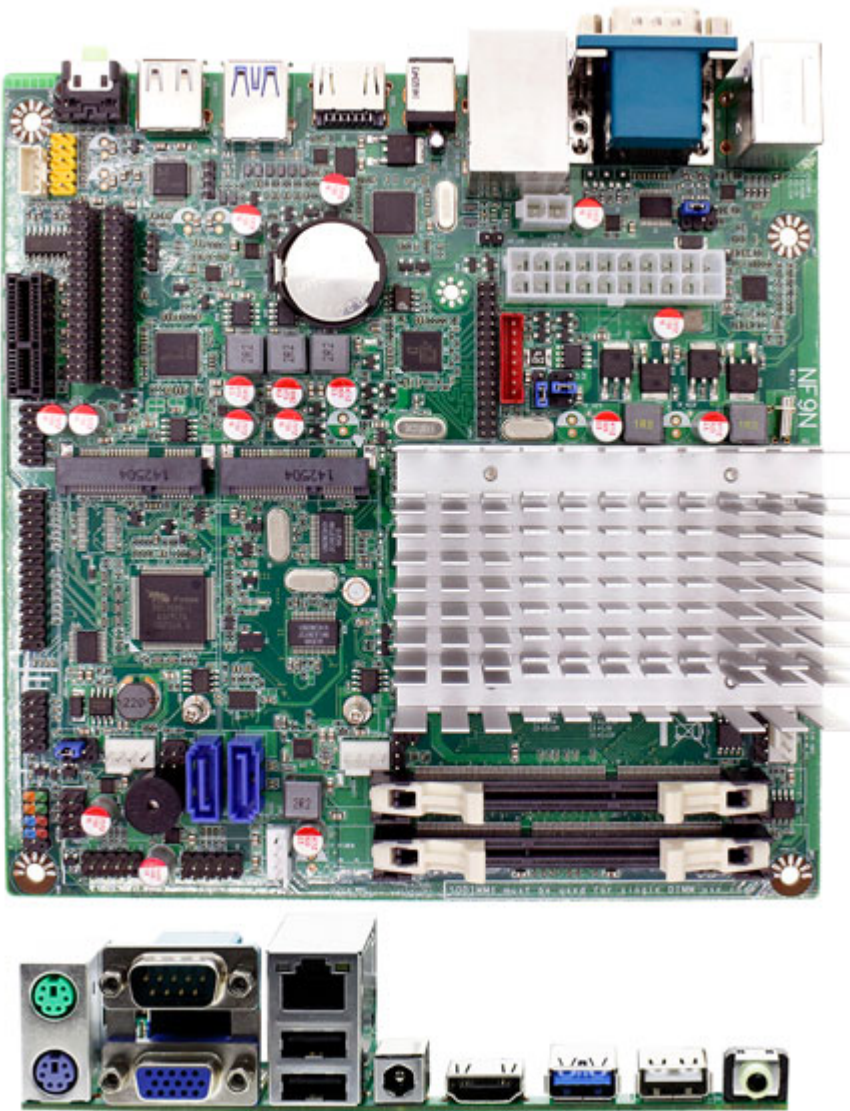

- Intel® Baytrail-M/D/I Processor
- Supports Dual Channel DDR3L 1333/1066 MHz, 2 x SO-DIMM, up to 8GB system memory
- 1 x VGA, 1 x HDMI, 1 x LVDS
- 1 x USB 3.0, 7 x USB 2.0, 2 x SATAII
- 1 x mini-PCIe, 1 x PCIe x1 slot, 1 x mSATA
- Gigabit LAN : 1 x LAN
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan
- Support DC Fan

|                  |                                  |
|------------------|----------------------------------|
| Form Factor      |                                  |
| Dimensions       | - Mini-ITX ( 170 x 170mm)        |
| Processor System |                                  |
| CPU              | - Intel Baytrail-M/D/I Processor |
| Core Number      | - (By CPU)                       |
| Max Speed        | - (By CPU)                       |
| L2 Cache         | - (By CPU)                       |
| Chipset          | - N/A                            |
| BIOS             | - AMI 64Mb Flash ROM             |
| Expansion Slot   |                                  |

|                        |                                        |
|------------------------|----------------------------------------|
| PCI                    | - 0                                    |
| Mini-PCIe              | - 1                                    |
| mSATA                  | - 1 (share with SATA2)                 |
| PCIe                   | - 1 x1                                 |
| CFast Card Socket      | - 0                                    |
| CF Card Socket         | - 0                                    |
| Memory                 |                                        |
| Technology             | - 2 * Dual Channel DDR3L 1333/1066 MHz |
| Max.                   | - 8GB                                  |
| Socket                 | - 2 * DDR3 SO-DIMM                     |
| Graphics               |                                        |
| Controller             | - Intel® HD Graphics                   |
| VRAM                   | - Shared Memory                        |
| VGA                    | - 1                                    |
| LVDS                   | - 1                                    |
| HDMI                   | - 1                                    |
| DVI                    | - 0                                    |
| DisplayPort            | - 0                                    |
| MultiDisplay           | - Yes (Dual Display)                   |
| Ethernet               |                                        |
| Ethernet               | - 10/100/1000 Mbps                     |
| Controller             | - GbE LAN: Intel I211AT                |
| Connector              | - 1 * RJ 45                            |
| SATA                   |                                        |
| Max Data Transfer Rate | - 2 * SATAII (3.0Gb/s)                 |
| Rear I/O               |                                        |
| VGA                    | - 1                                    |
| DVI                    | - 0                                    |
| HDMI                   | - 1                                    |
| DisplayPort            | - 0                                    |
| Ethernet               | - 1                                    |
| USB                    | - 4 (3 * USB 2.0 + 1 * USB3.0)         |
| Audio                  | - 1 (Line-out)                         |
| Serial                 | - 1                                    |
| eSATA                  | - 0                                    |
| PS2                    | - 2                                    |
| DC-input               | - 1 (12V DC-in JACK)                   |
| Internal Connector     |                                        |
| USB                    | - 4 (4 * USB 2.0)                      |
| PS2                    | - 0                                    |
| LVDS / inverter        | - 1                                    |
| VGA                    | - 0                                    |
| Serial (COM)           | - 1                                    |
| SATA                   | - 2 * SATAII (3.0Gb/s)                 |
| mPCIe                  | - 1                                    |
| Parallel               | - 1                                    |
| mSATA                  | - 1 (share with SATA2)                 |
| CIR                    | - 0                                    |
| GPIO 8-bit             | - 4in / 4 out                          |
| Chassis intrusion      | - 1 (via 2pin header)                  |
| Audio Header           | - 1                                    |
| Watchdog Timer         |                                        |
| Output                 | - From Super I/O to drag RESETCON#     |
| Interval               | - 256 segments, 0,1,2...255sec/min     |
| Power Requirements     |                                        |

|                |                                                                                                                          |
|----------------|--------------------------------------------------------------------------------------------------------------------------|
| Input PWR      | - 12V DC-In                                                                                                              |
| Power On       | AT/ATX Supported<br>- AT : Directly PWR on as Power input ready<br>- ATX: Press Button to PWR on after Power input ready |
| Certifications |                                                                                                                          |
| Certifications | - CE, FCC, RoHS, REACH                                                                                                   |
| Environment    |                                                                                                                          |
| Temperature    | - Operating: 0■ – 60■<br>- Storage: -20■ – 85■                                                                           |