



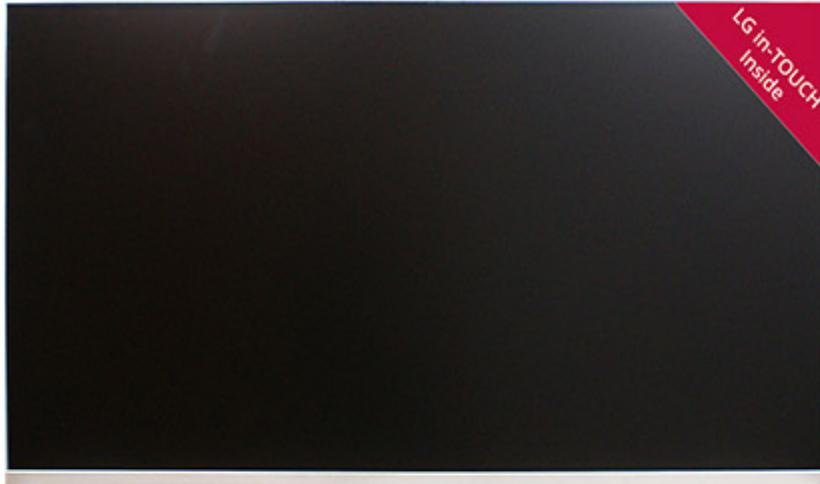

1689.00 EUR

incl. 19% VAT, plus [shipping](#)

- Tiger Lake i5-1135G7 !
- LG in-TOUCH !
- 12-36V !

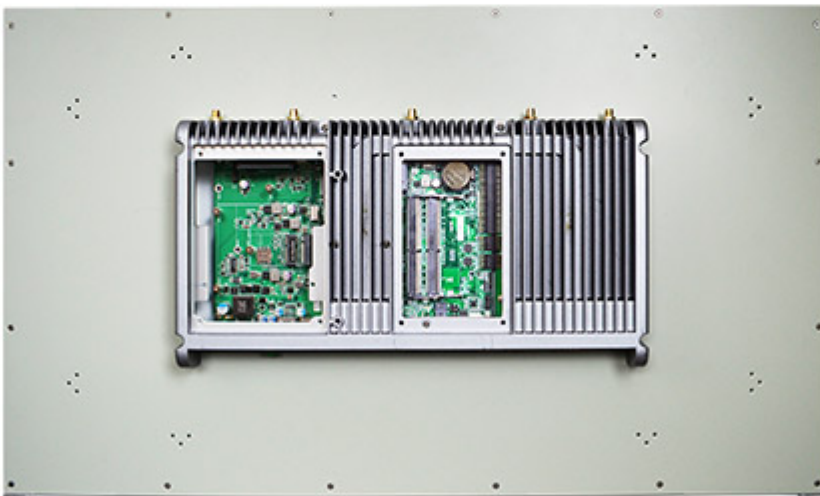

- 27.0" 300 nits TFT LCD with LED backlight
- LG in-cell 10-points Multi Capacitive Touch
- A true Flat and Slim Design, Clear Image, support Cover-Glass Elimination
- Support for easy HDD and DARM installation
- Support Cable less design
- 12-36V DC-input Support, with Electrical Over Stress (EOS), OVP design

Display	– Rugged protection, metal front bezel – 27.0" With LED Backlight – 300 nits – 16.7m display color – 1920 x 1080 @60Hz resolution – 178°/178° viewing angle (H/V) – 0.1038 x 0.1038mm pixel pitch – 16:9 aspect ratio – 1000:1 contrast ratio – 13ms response time
---------	---

Touch Screen	– Projected capacitive type (LG in-cell Touch) – 597.888 x 336.312mm ±0.2mm active range – Surface Hardness ■3H (JIS-5400) – Support High Touch Performance – Support Strengthened Polarizer for in-TOUCH – Support High Picture Quality – Support Low Reflection / Deep Black – Support No deterioration of PQ caused by TOUCH Film – Support Low color Shift – Support Stable Touch without Flash
Case	– Aluminum panel – Iron case – White color – Spray paint coating requirement
Main System	– Intel® Tiger Lake i5-1135G7 2.4GHz/QC processor – 2* DDR4 SO-DIMM (Max 64GB) – 256MB SPI Flash ROM – Watchdog Timer 256 levels, 0~255 sec. – OS Support Windows 10/11, Linux
Storage	– 1* 2.5" SATA HDD – 1* M.2 M key (2242/2280, PCI-Ex4)
Expansion	– 1* M.2 E key (2230) for WIFI – 1* M.2 B key (3042/3052/6570) for 4G/5G Module (4pcs Built in Antenna)
I/O Connector	– 2* USB3.2 (Gen. 1) – 4* USB2.0 – 2* RS232/422/485 – 2* RS232 (option 16bit GPIO) – 1* HDMI – 1* AT/ATX Mode Button – 2* RJ45 (1* Intel® I225-V 2.5GbE, 1* Intel® I219LM GbE) – 1* 12~36V DC-in Locking Jack – 1* Power button – 1* 2pin Front Power button
Power Input	– AC version: 100~240V AC-DC 90W power adapter or – DC version: 12VDC with over current protection fuse
Power Consumption	– 48W
Dimensions	– 611.20 x 359.18 x 59.00mm
Compliance	– CE, FCC, Option
Safety	– Shock: 1ms duration – Vibration: 5~500Hz/1 Grms
Temperature	– Operating: : -10°C ~ 50°C – Storage: -20°C ~ 70°C